

Computability

voorjaar 2025

<https://liacs.leidenuniv.nl/~vlietrvan1/computability/>

college 6, 10 maart 2025

8.3. More General Grammars

9. Undecidable Problems

9.1. A Language That Can't Be Accepted,
and a Problem That Can't Be Decided

9.2. Reductions and the Halting Problem

Huiswerkopgave

inleverdatum voor 0.2 punt: 18 maart 2025, 23.59 uur

doel bij nakijken eerste inzendingen: vóór 27 maart

A slide from lecture 5


Theorem 8.14.

For every Turing machine T with input alphabet Σ , there is an unrestricted grammar G generating the language $L(T) \subseteq \Sigma^*$.

Proof.

1. Generate (every possible) input string for T .
2. Simulate computation of T for this input string as derivation in grammar.
3. If T reaches accept state, reconstruct original input string.

A slide from lecture 5

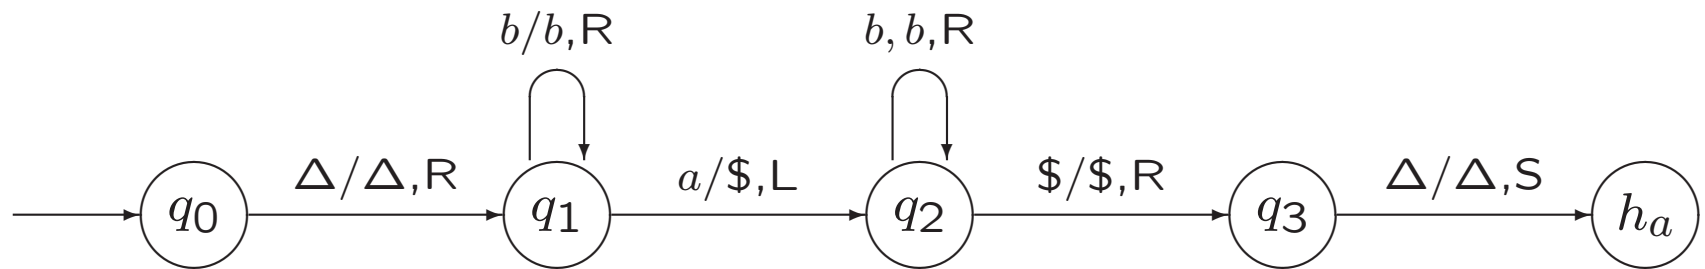

Computation for $x = ba$:

$$q_0 \Delta ba \Delta \vdash \Delta q_1 ba \Delta \vdash \Delta b q_1 a \Delta \vdash \Delta q_2 b \$ \Delta \vdash \Delta b q_2 \$ \Delta \vdash \Delta b \$ q_3 \Delta \vdash \Delta b \$ h_a \Delta$$


A slide from lecture 5

Theorem 8.14.

For every Turing machine T with input alphabet Σ , there is an unrestricted grammar G generating the language $L(T) \subseteq \Sigma^*$.

Proof.

1. Generate (every possible) input string for T (two copies), with additional $(\Delta\Delta)$'s and state.
2. Simulate computation of T for this input string as derivation in grammar (on second copy).
3. If T reaches accept state, reconstruct original input string.

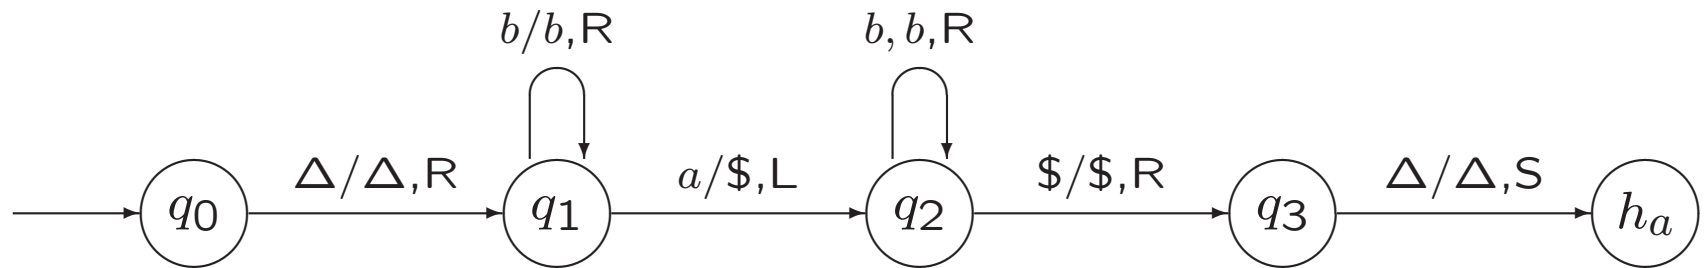

Computation for $x = ba$:

$$q_0 \Delta ba \Delta \vdash \Delta q_1 ba \Delta \vdash \Delta b q_1 a \Delta \vdash \Delta q_2 b \$ \Delta \vdash \Delta b q_2 \$ \Delta \vdash \Delta b \$ q_3 \Delta \vdash \Delta b \$ h_a \Delta$$

Theorem 8.14.

For every Turing machine T with input alphabet Σ , there is an unrestricted grammar G generating the language $L(T) \subseteq \Sigma^*$.

Proof.

1. Generate (every possible) input string for T (two copies), with additional $(\Delta\Delta)$'s and state.
2. Simulate computation of T for this input string as derivation in grammar (on second copy).
3. If T reaches accept state, reconstruct original input string.

Ad 2. Move $\delta(p, a) = (q, b, R)$ of T

yields production $p(\sigma_1 a) \rightarrow (\sigma_1 b)q$

Move $\delta(p, a) = (q, b, L)$ of T

yields production $(\sigma_1 \sigma_2)p(\sigma_3 a) \rightarrow q(\sigma_1 \sigma_2)(\sigma_3 b)$

Move $\delta(p, a) = (q, b, S)$ of T

yields production $p(\sigma_1 a) \rightarrow q(\sigma_1 b)$

3. If T reaches accept state, reconstruct original input string. . .

Theorem 8.14.

For every Turing machine T with input alphabet Σ , there is an unrestricted grammar G generating the language $L(T) \subseteq \Sigma^*$.

Proof.

1. Generate (every possible) input string for T (two copies), with additional $(\Delta\Delta)$'s and state.
2. Simulate computation of T for this input string as derivation in grammar (on second copy).
3. If T reaches accept state, reconstruct original input string.

Ad 3. Propagate h_a all over the string

$$h_a(\sigma_1\sigma_2) \rightarrow \sigma_1, \text{ for } \sigma_1 \in \Sigma$$

$$h_a(\Delta\sigma_2) \rightarrow \Lambda$$

Theorem 8.14.

For every Turing machine T with input alphabet Σ , there is an unrestricted grammar G generating the language $L(T) \subseteq \Sigma^*$.

Proof.

1. Generate (every possible) input string for T (two copies), with additional $(\Delta\Delta)$'s and state.
2. Simulate computation of T for this input string as derivation in grammar (on second copy).
3. If T reaches accept state, reconstruct original input string.

Ad 3. Propagate h_a all over the string (too few / many h_a 's...)

$$h_a(\sigma_1\sigma_2) \rightarrow \sigma_1, \text{ for } \sigma_1 \in \Sigma$$

$$h_a(\Delta\sigma_2) \rightarrow \Lambda$$

8.5. Not Every Language is Recursively Enumerable

reg. languages	FA	reg. grammar	reg. expression
determ. cf. languages	DPDA		
cf. languages	PDA	cf. grammar	
cs. languages	LBA	cs. grammar	
re. languages	TM	unrestr. grammar	

9. Undecidable Problems

9.1. A Language That Can't Be Accepted, and a Problem That Can't Be Decided

A slide from lecture 4

Definition 8.1. Accepting a Language and Deciding a Language

A Turing machine T with input alphabet Σ accepts a language $L \subseteq \Sigma^*$,
if $L(T) = L$.

T decides L ,
if T computes the characteristic function $\chi_L : \Sigma^* \rightarrow \{0, 1\}$

A language L is *recursively enumerable*,
if there is a TM that accepts L ,

and L is *recursive*,
if there is a TM that decides L .

A slide from lecture 4

Definition 7.33. An Encoding Function

Assign numbers to each state:

$$n(h_a) = 1, n(h_r) = 2, n(q_0) = 3, n(q) \geq 4 \text{ for other } q \in Q.$$

Assign numbers to each tape symbol:

$$n(a_i) = i.$$

Assign numbers to each tape head direction:

$$n(R) = 1, n(L) = 2, n(S) = 3.$$

A slide from lecture 4

Definition 7.33. An Encoding Function (continued)

For each move m of T of the form $\delta(p, \sigma) = (q, \tau, D)$

$$e(m) = 1^{n(p)}01^{n(\sigma)}01^{n(q)}01^{n(\tau)}01^{n(D)}0$$

We list the moves of T in **some** order as m_1, m_2, \dots, m_k , and we define

$$e(T) = e(m_1)0e(m_2)0 \dots 0e(m_k)0$$

If $z = z_1z_2 \dots z_j$ is a string, where each $z_i \in \mathcal{S}$,

$$e(z) = 01^{n(z_1)}01^{n(z_2)}0 \dots 01^{n(z_j)}0$$

	$e(T_0)$	$e(T_1)$	$e(T_2)$	$e(T_3)$	$e(T_4)$	$e(T_5)$	$e(T_6)$	$e(T_7)$	$e(T_8)$	$e(T_9)$
$L(T_0)$	1	0	1	0	0	1	0	0	0	1
$L(T_1)$	0	1	1	1	0	0	0	0	1	0
$L(T_2)$	1	0	0	1	0	0	1	0	0	0
$L(T_3)$	0	0	0	0	0	0	0	0	0	0
$L(T_4)$	0	0	0	0	1	0	0	0	0	0
$L(T_5)$	0	0	1	1	0	1	0	1	0	0
$L(T_6)$	0	0	0	0	0	0	0	0	1	0
$L(T_7)$	1	1	1	1	1	1	1	1	1	1
$L(T_8)$	0	1	0	1	0	1	0	1	0	1
$L(T_9)$	0	0	0	0	0	0	0	0	0	0
...						...				

	$e(T_0)$	$e(T_1)$	$e(T_2)$	$e(T_3)$	$e(T_4)$	$e(T_5)$	$e(T_6)$	$e(T_7)$	$e(T_8)$	$e(T_9)$
$L(T_0)$	1	0	1	0	0	1	0	0	0	1
$L(T_1)$	0	1	1	1	0	0	0	0	1	0
$L(T_2)$	1	0	0	1	0	0	1	0	0	0
$L(T_3)$	0	0	0	0	0	0	0	0	0	0
$L(T_4)$	0	0	0	0	1	0	0	0	0	0
$L(T_5)$	0	0	1	1	0	1	0	1	0	0
$L(T_6)$	0	0	0	0	0	0	0	0	1	0
$L(T_7)$	1	1	1	1	1	1	1	1	1	1
$L(T_8)$	0	1	0	1	0	1	0	1	0	1
$L(T_9)$	0	0	0	0	0	0	0	0	0	0
...						...				
NSA	0	0	1	1	0	0	1	0	1	1

Hence, NSA is not recursively enumerable.

A slide from lecture 4

Some Crucial features of any encoding function e :

1. It should be possible to decide algorithmically, for any string $w \in \{0, 1\}^*$, whether w is a legitimate value of e .
2. A string w should represent at most one Turing machine with a given input alphabet Σ , or at most one string z .
3. If $w = e(T)$ or $w = e(z)$, there should be an algorithm for *decoding* w .

Set-up of constructing language NSA that is not RE:

1. Start with list of RE languages over $\{0, 1\}$
(which are subsets of $\{0, 1\}^*$): $L(T_0), L(T_1), L(T_2), \dots$
each one associated with specific element of $\{0, 1\}^*$
(namely $e(T_i)$)
2. Define another language NSA by:
$$e(T_i) \in NSA \iff e(T_i) \notin L(T_i)$$
3. Conclusion: for all i , $NSA \neq L(T_i)$
Hence, NSA is not RE

Set-up of constructing language NSA that is not RE:

1. Start with **collection** of RE languages over $\{0, 1\}$
(which are subsets of $\{0, 1\}^*$): $\{L(T) \mid \text{TM } T\}$
each one associated with specific element of $\{0, 1\}^*$
(namely $e(T)$)
2. Define another language NSA by:
$$e(T) \in NSA \iff e(T) \notin L(T)$$
3. Conclusion: for all TM T , $NSA \neq L(T)$
Hence, NSA is not RE

Set-up of constructing language that is not RE:

1. Start with list of RE languages over $\{0, 1\}$
(which are subsets of $\{0, 1\}^*$): $L(T_0), L(T_1), L(T_2), \dots$
each one associated with specific element of $\{0, 1\}^*$
2. Define another language L by:
$$x \in L \iff x \notin (\text{language that } x \text{ is associated with})$$
3. Conclusion: for all i , $L \neq L(T_i)$
Hence, L is not RE

Set-up of constructing language L that is not RE:

1. Start with list of RE languages over $\{0, 1\}$
(which are subsets of $\{0, 1\}^*$): $L(T_0), L(T_1), L(T_2), \dots$
each one associated with specific element of $\{0, 1\}^*$
(namely x_i)
2. Define another language L by:
$$x_i \in L \iff x_i \notin L(T_i)$$
3. Conclusion: for all i , $L \neq L(T_i)$
Hence, L is not RE

Every infinite list x_0, x_1, x_2, \dots of different elements of $\{0, 1\}^*$ yields language L that is not RE

	Λ	0	1	00	01	10	11	000	001	010	...
$L(T_0)$	1	0	1	0	0	1	0	0	0	1	...
$L(T_1)$	0	1	1	1	0	0	0	0	1	0	...
$L(T_2)$	1	0	0	1	0	0	1	0	0	0	...
$L(T_3)$	0	0	0	0	0	0	0	0	0	0	...
$L(T_4)$	0	0	0	0	1	0	0	0	0	0	...
$L(T_5)$	0	0	1	1	0	1	0	1	0	0	...
$L(T_6)$	0	0	0	0	0	0	0	0	1	0	...
$L(T_7)$	1	1	1	1	1	1	1	1	1	1	...
$L(T_8)$	0	1	0	1	0	1	0	1	0	1	...
$L(T_9)$	0	0	0	0	0	0	0	0	0	0	...
...							...				
newL	0	0	1	1	0	0	1	0	1	1	...

Hence, newL is not recursively enumerable.

Definition 9.1. The Languages *NSA* and *SA*

Let

$$NSA = \{e(T) \mid T \text{ is a TM, and } e(T) \notin L(T)\}$$

$$SA = \{e(T) \mid T \text{ is a TM, and } e(T) \in L(T)\}$$

(*NSA* and *SA* are for “non-self-accepting” and “self-accepting.”)

A slide from lecture 4

Some Crucial features of any encoding function e :

1. It should be possible to decide algorithmically, for any string $w \in \{0, 1\}^*$, whether w is a legitimate value of e .
2. A string w should represent at most one Turing machine with a given input alphabet Σ , or at most one string z .
3. If $w = e(T)$ or $w = e(z)$, there should be an algorithm for *decoding* w .

Theorem 9.2. The language NSA is not recursively enumerable.
The language SA is recursively enumerable but not recursive.

Proof...

Exercise 9.2.

Describe how a universal Turing machine could be used in the proof that SA is recursively enumerable.

Given a TM T , does T accept the string $e(T)$?

Decision problem: problem for which the answer is 'yes' or 'no':

Given . . . , is it true that . . . ?

Given an undirected graph $G = (V, E)$,
does G contain a Hamiltonian path?

Given a list of integers x_1, x_2, \dots, x_n ,
is the list sorted?

Self-Accepting: Given a TM T , does T accept the string
 $e(T)$?

instances. . .

Decision problem: problem for which the answer is 'yes' or 'no':

Given . . . , is it true that . . . ?

yes-instances of a decision problem:

instances for which the answer is 'yes'

no-instances of a decision problem:

instances for which the answer is 'no'

Self-Accepting: Given a TM T , does T accept the string $e(T)$?

Three languages corresponding to this problem:

1. *SA*: strings representing yes-instances
2. *NSA*: strings representing no-instances
3. ...

Self-Accepting: Given a TM T , does T accept the string $e(T)$?

Three languages corresponding to this problem:

1. SA : strings representing yes-instances
2. NSA : strings representing no-instances
3. E' : strings not representing instances

For general decision problem P ,
an encoding e of instances I as strings $e(I)$ over alphabet Σ
is called *reasonable*, if

1. there is algorithm to decide if string over Σ is encoding $e(I)$
2. e is injective
3. string $e(I)$ can be decoded

A slide from lecture 4

Some Crucial features of any encoding function e :

1. It should be possible to decide algorithmically, for any string $w \in \{0, 1\}^*$, whether w is a legitimate value of e .
2. A string w should represent at most one Turing machine **with a given input alphabet Σ** , or at most one string z .
3. If $w = e(T)$ or $w = e(z)$, there should be an algorithm for *decoding* w .

For general decision problem P and reasonable encoding e ,

$$Y(P) = \{e(I) \mid I \text{ is yes-instance of } P\}$$

$$N(P) = \{e(I) \mid I \text{ is no-instance of } P\}$$

$$E(P)' = (Y(P) \cup N(P))'$$

$E(P)$ must be recursive

Definition 9.3. Decidable Problems

If P is a decision problem, and e is a reasonable encoding of instances of P over the alphabet Σ , we say that P is *decidable* if $Y(P) = \{e(I) \mid I \text{ is a yes-instance of } P\}$ is a recursive language.

Theorem 9.4. The decision problem *Self-Accepting* is undecidable.

Proof...

For every decision problem, there is *complementary* problem P' , obtained by changing 'true' to 'false' in statement.

Non-Self-Accepting:

Given a TM T , does T fail to accept $e(T)$?

Theorem 9.5. For every decision problem P , P is decidable if and only if the complementary problem P' is decidable.

Proof...

SA vs. NSA

Self-Accepting vs. Non-Self-Accepting

9.2. Reductions and the Halting Problem

(Informal) Examples of reductions

1. Recursive algorithms
2. Given NFA M and string x , is $x \in L(M)$?
3. Given FAs M_1 and M_2 , is $L(M_1) \subseteq L(M_2)$?

Theorem 2.15.

Suppose $M_1 = (Q_1, \Sigma, q_1, A_1, \delta_1)$ and $M_2 = (Q_2, \Sigma, q_2, A_2, \delta_2)$ are finite automata accepting L_1 and L_2 , respectively.

Let M be the FA $(Q, \Sigma, q_0, A, \delta)$, where

$$Q = Q_1 \times Q_2$$

$$q_0 = (q_1, q_2)$$

and the transition function δ is defined by the formula

$$\delta((p, q), \sigma) = (\delta_1(p, \sigma), \delta_2(q, \sigma))$$

for every $p \in Q_1$, every $q \in Q_2$, and every $\sigma \in \Sigma$.

Then

1. If $A = \{(p, q) \mid p \in A_1 \text{ or } q \in A_2\}$,
 M accepts the language $L_1 \cup L_2$.
2. If $A = \{(p, q) \mid p \in A_1 \text{ and } q \in A_2\}$,
 M accepts the language $L_1 \cap L_2$.
3. If $A = \{(p, q) \mid p \in A_1 \text{ and } q \notin A_2\}$,
 M accepts the language $L_1 - L_2$.

(Informal) Examples of reductions

3. *SubsetFA*: Given FAs M_1 and M_2 , is $L(M_1) \subseteq L(M_2)$?

3'. *AcceptsNothingFA*: Given FA M , is $L(M) = \emptyset$?